

Roll Paper Towel Dispenser & Waste Receptacle – Recessed
Paper Towel Combination Units
Traditional
MasterFormat Section 10 28 13

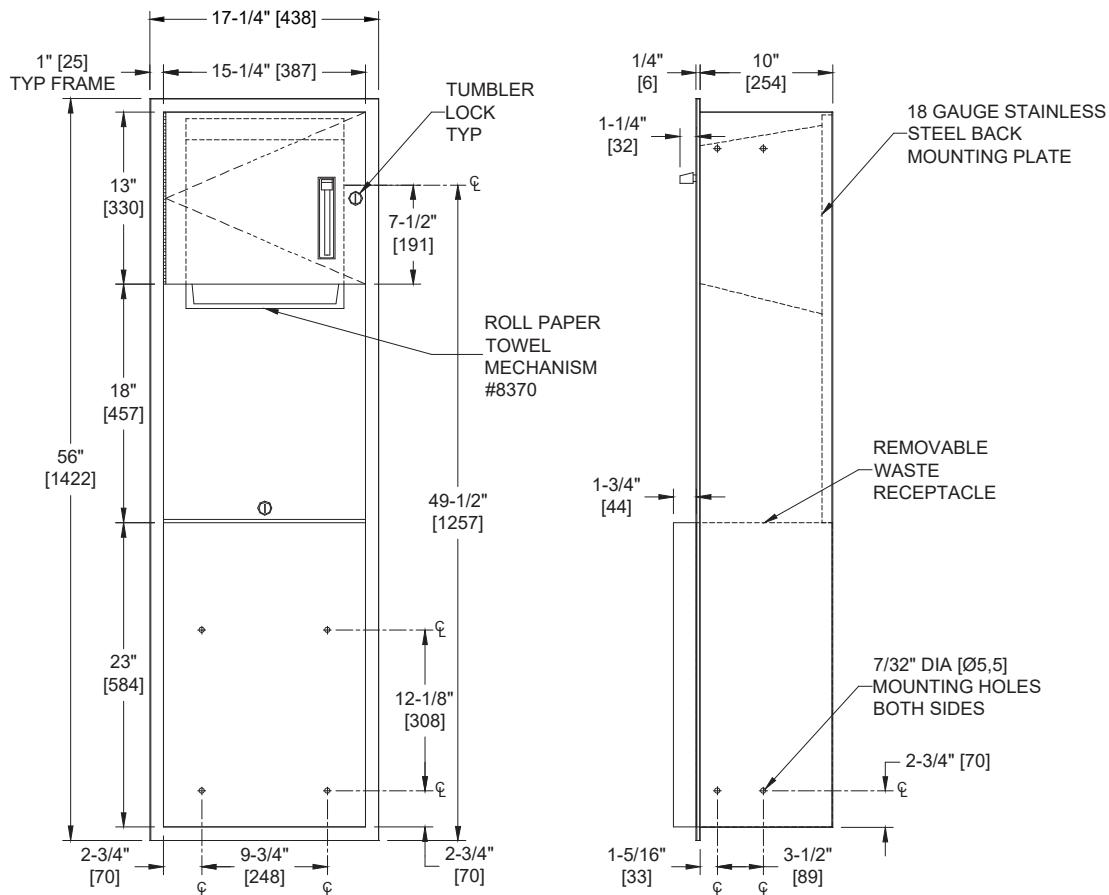

Scan for
Information


SUSTAINABILITY/LEED

MR 4.1 (1) EQ 4.1 (1)

MR 4.2 (1) EQ 4.2 (1)

MR 6 (1) EQ 4.4 (1)



NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Unit mechanically dispenses 8" [205] or 9" [230] wide standard towel roll up to 800 ft. (244m) long and has stub roll capability for continuous dispensing. 18 gal. (68 liters) disposal capacity. Towels are fed by lever action until supply is depleted. Towel feed length is adjustable for economy by pin (supplied) limiting of lever stroke length. Unit may be reloaded with a full roll to automatically start when finished with an existing partial roll. Locking compartment and receptacle retainer prevents unauthorized access or removal.

KEY FEATURES & SPECIFICATIONS

- Double-pan construction door has "no-Flex" fiberboard filler for added rigidity and strength
- Door is attached to the cabinet with a 3/16" diameter [Ø5] Heavy-duty, Multi-Staked Stainless Steel Piano Hinge
- 22 gauge Type 304 Stainless Steel - Satin Finish
- Recessed
- Roll Towels - up to 800 ft. [244M] Length / 18.0 Gal. (68.0 L) Waste Capacity

**OPERATION & MAINTENANCE**

Towels are fed by lever action until supply is depleted. Towel feed length is adjustable for economy by pin (supplied) limiting of lever stroke length. Unit may be reloaded with a full roll to automatically start when finished with an existing partial roll. Waste container is emptied manually on cycle determined by maintenance needs. Locking compartment and receptacle retainer prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	17-1/4" [438] W x 56" [1422] H x 11-3/4" [299] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	RollTowels - up to 800 ft. Length / 18.0 Gal. (68.0 L) Waste Capacity

INSTALLATION

Install unit in wall recess using four (4) #10 self-threading screws (by others) through concealed mounting holes provided. Note that top of Rough Wall Opening (RWO) is 3/4" [19] below top of unit. Suggested mounting height is 55" [1397] AFF to lever handle. For reduced height compliance with 6" [152] curb and compliance with 2010 ADA Accessibility Standards see Model No's 0463 or 046921 series.

Rough Wall Opening (RWO) required is 15-3/4" [400] W x 54-1/2" [1384] H x 10" [254] D minimum

WARRANTY

One (1) Year from date of invoice