
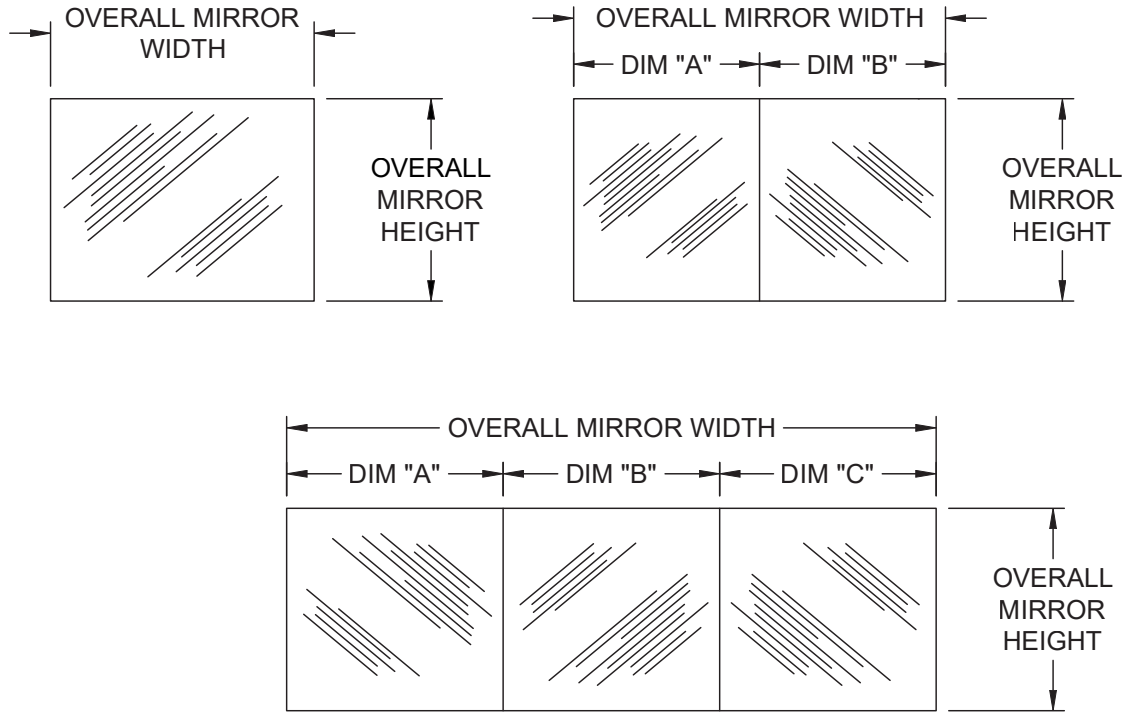


Frameless Polished Plate Glass Mirror - 1/4" [6] thick

Mirrors

MasterFormat Section 10 28 13

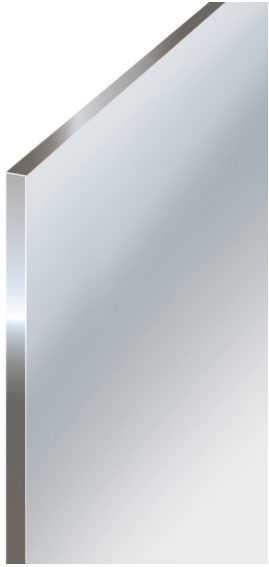

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Frameless mirrors offer clean lines to complement every type of interior design and are easy to care for. One piece can be up to 32 sq. ft. (2.97 m²), as long as either H or W dimension is less than 96" [2438]. Mirrors larger than 32 sq. ft. (2.97 m²) or with either linear H or W dimension larger than 96" [2438] shall be supplied as multiple pieces. Made of 1/4" [6] polished plate glass.

KEY FEATURES & SPECIFICATIONS

- Clean lines of the frameless mirror complements every bathroom
- Plate Glass - 1/4" [6] thick - Polished / other glazing options not available with polished edges
- Surface Mounted
- Polished edge available (only on "A" Glazing Mirrors)
- Various Sizes

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	Various Sizes Available
Construction	Plate Glass - 1/4" [6] thick - Polished
Mounting	Surface Mounted
Materials	<u>Glass:</u> Standard glazing is #1 quality, 1/4" [6.4] thick plate/float, silver coated and hermetically sealed with a uniform coating of electrolytic copper plating, warranted against silver spoilage for 15 years. Mirrors meet Federal Spec. DD-M-411C, ASTM C-1503, and ASTM C-1036-91.

INSTALLATION

Surface mount unit to wall using hardware supplied by installer. Mounting clips 8287-001 are provided. Continuous J-clip mounting channels are also available separately as POA items. For compliance with 2010 ADA Accessibility Standards and 2015 ABA Standards, install unit with bottom edge of reflecting surface no higher than 40" [1016] maximum Above Finished Floor.

SIZE OPTIONS
GLAZING OPTIONS

(A) Plate Glass - 1/4" [6.4] #1 quality polished, silver coated and hermetically sealed with an electrolytic copper plating. Mirrors meet Federal Spec. No. DD-M-411C, ASTM C-1503 and ASTM-C-1036-91. Image quality: Excellent

WARRANTY

Warranted against silver spoilage for 15 years from date of Invoice